



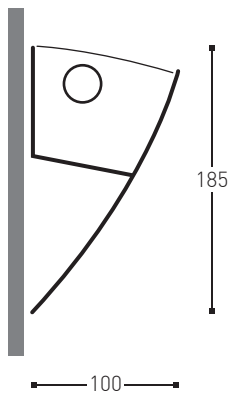


Christchurch Grammar

100
c r e s c e n t

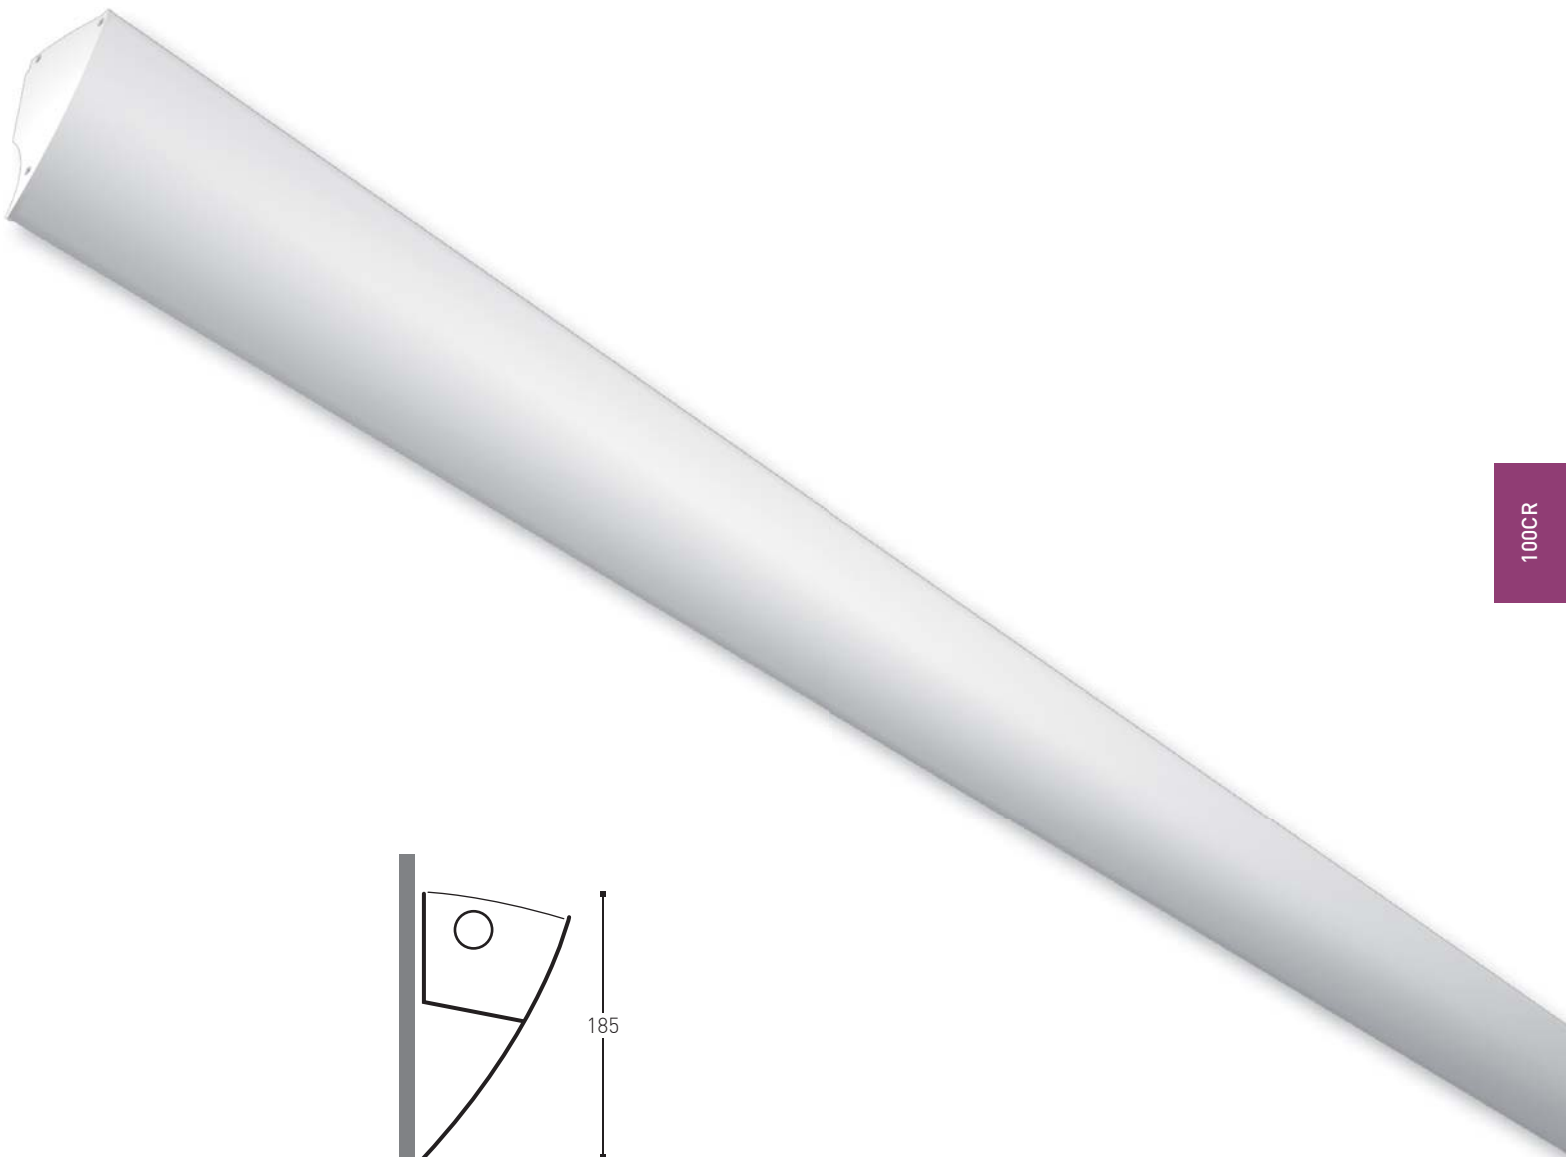

1 0 0 c r e s c e n t

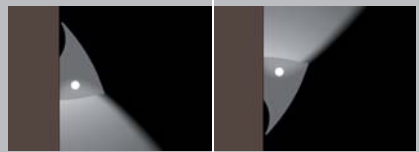

other configurations may be possible

diffusers








clear reeded acrylic (indirect)



microsphere frosted acrylic (indirect)

lamp units



Fluorescent Lamps		Lamp Unit Length (ECG)		
Lamp Type	W	a		b
		non dim	dim	
 T16/T5	14W/24W	-	-	580
	21W/39W	-	-	880
	28W/54W	-	-	1180
	35W/80W	-	-	1480
 T26/T8	18W	-	-	620
	30W	-	-	925
	36W	-	-	1230
	58W	-	-	1530
 TCS	5W	290	-	110
	7W	320	-	140
	9W	350	-	170
	11W	420	-	240
 TCL	18W	480	660	230
	24W	585	775	335
	36W	675	855	425
	55W	905	975	545

Unit lengths are approximate and may vary
 Specifications subject to change without notice


100CR



ends




countersunk philips head screws




counterbored socket head cap screws


suspension

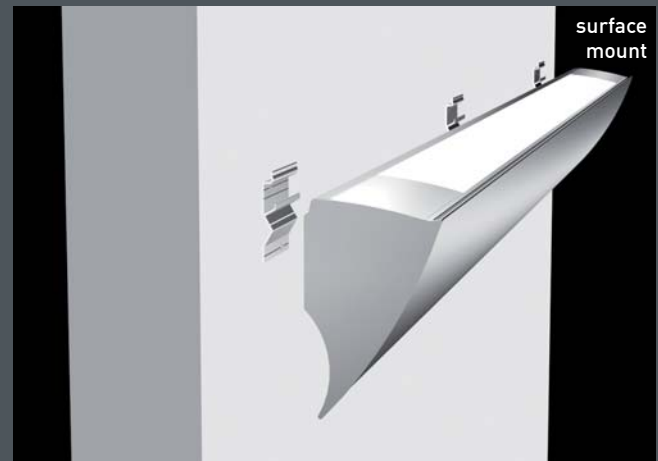

connectors

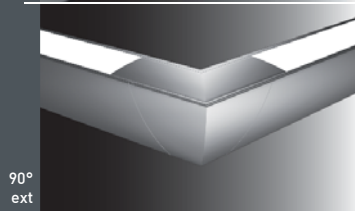

custom angled connectors available on request



space requirements





180° coupling is possible mid lamp unit depending on optic and control gear choice. 180° coupling is always preferable between lamp units. 150mm should be allowed.

packaging




5.1kg/m - 120 x 265 x (l + 200mm)

finish

-  clear anodised
-  matt textured silver
-  matt textured white
-  other colour

other finishes available on request

photometrics



photometric files available for download from kliksystems.com

100 crescent pre-configured



1. Choose your item and lamp unit configuration from the tables on the following pages.

2-6 Select your preferred options from the choices 2 to 6 on the right


7. See an example product specification at the bottom of the page

1. part no.

choose the desired configuration from the tables on the following pages

100CR105		2x1/28W	CR	2560	}
100CR106		2x1/35W	CR	3160	
100CR107		2x1/54W	CR	2560	

2. optic (indirect)




microsphere frosted acrylic (MSF) - 21

3. dimming



non-dim 31
1-10V 32
DSI 33
DALI 34

4. suspension

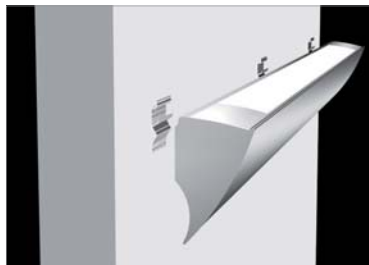

surface mount

451

5. end



countersunk philips head screws

3mm (std) - 51




counterbored socket head cap screws

5mm - 56

6. colour finish



7. example

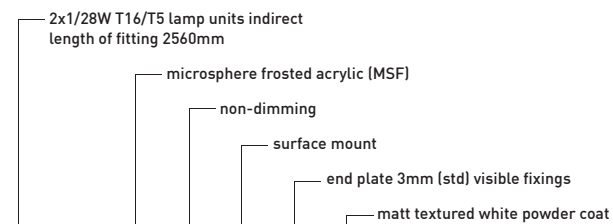


1	2	3	4	5	6	Final product specification
100CR105	21	31	451	51	63	100CR105 . 21 . 31 . 451 . 51 . 63

Fluorescent lamps will be supplied in colour 840 unless specified otherwise.



Lamp orientation legend

lamp colours represent separate switch wiring ■ ■ ■ ■

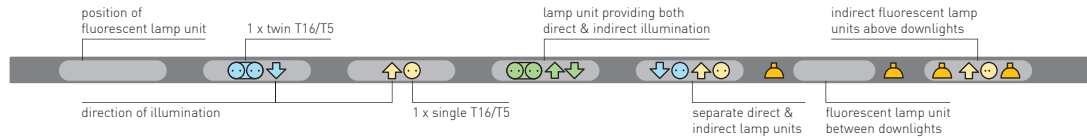

■ Data is approximate and subject to change without notice. Product images are representations only - actual product may vary.

part no.	direct	downlight	indirect	optic direct	optic indirect	length (mm)	weight (kgs)	pack size h x w x L (mm)			cubic m ³
100CR101			1x1/28W		CR	1380	7.0	120	265	1580	0.050
100CR102			1x1/35W		CR	1680	8.6	120	265	1880	0.060
100CR103			1x1/54W		CR	1380	7.0	120	265	1580	0.050
100CR104			1x1/80W		CR	1680	8.6	120	265	1880	0.060
100CR105			2x1/28W		CR	2560	13.1	120	265	2760	0.088
100CR106			2x1/35W		CR	3160	16.1	120	265	3360	0.107
100CR107			2x1/54W		CR	2560	13.1	120	265	2760	0.088
100CR108			2x1/80W		CR	3160	16.1	120	265	3360	0.107
100CR109			3x1/28W		CR	3730	19.0	120	265	3930	0.125
100CR110			3x1/35W		CR	4630	23.6	120	265	4830	0.154
100CR111			3x1/54W		CR	3730	19.0	120	265	3930	0.125
100CR112			3x1/80W		CR	4630	23.6	120	265	4830	0.154

preconfigured

If you don't see a configuration you like, no problem, **KLIK** can custom make to your unique specifications.

Just turn back to the **made to measure** pages and follow the specification instructions, or call your local **KLIK** representative.