




Oamaru Hospital

1 0 0 o v a l

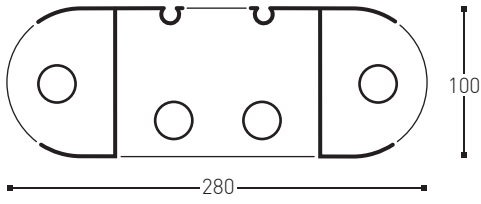

1 0 0 o v a l



other configurations may be possible

diffusers



clear reeded acrylic



microsphere frosted acrylic



cross blade louvre







parabolic louvre semi-specular








clear reeded acrylic (indirect)

asymmetric option also available

lamp units

Fluorescent Lamps		a		b	
		non-continuous control gear between lamp ends		continuous control gear behind lamp	
		Lamp Unit Length (ECG)			
Lamp Type	W	a		b	
		non dim	dim		
 T16/T5	14W/24W	-	-	580	
	21W/39W	-	-	880	
	28W/54W	-	-	1180	
	35W/80W	-	-	1480	
 T26/T8	18W	-	-	620	
	30W	-	-	925	
	36W	-	-	1230	
	58W	-	-	1530	
 TCS	5W	290	-	110	
	7W	320	-	140	
	9W	350	-	170	
	11W	420	-	240	
	TCL	18W	480	660	230
 TCL	24W	585	775	335	
	36W	675	855	425	
	55W	905	975	545	

Use Continuous lamp unit lengths plus a 50mm space between lamp units when using low brightness parabolic (VDU) louvres

Downlights		a	b	c
				
Lamp Type	W	a	b	c
MR11 fixed/adj	 20W/35W	120	205	290
MR16 adj	 20W/35W/50W	150	250	350

Unit lengths are approximate and may vary  
Specifications subject to change without notice

made to measure *horizontal*

suspension

1000V

ends



2mm standard



5mm concealed fixing

connectors



90°



T




X°



180°

custom angled connectors available on request



space requirements

180° coupling is possible mid lamp unit depending on optic and control gear choice. 180° coupling is always preferable between lamp units. 150mm should be allowed.

accessories



1



3



2



4

1 adjustable low voltage MR16 downlights  
2 power outlets

3 concealed PA speaker systems.  
4 emergency systems  
other accessories available on request

packaging




7.5kg/m - 175 x 330 x (L + 200mm)

finish

- clear anodised
- matt textured silver
- matt textured white
- other colour

see [kliksystems.com](http://kliksystems.com) for current colour availability.

photometrics



photometric files available for download from [kliksystems.com](http://kliksystems.com)



diffusers







clear reeded (direct/indirect)








cross blade louvre (direct)  
clear reeded (indirect)

1000V

lamp units

Fluorescent Lamps		a		b	
		non-continuous control gear between lamp ends		continuous control gear behind lamp	
Lamp Type	W	Lamp Unit Length (ECG)			
		a		b	
		non dim	dim		
T16/T5 	14W/24W	-	-	580	
	21W/39W	-	-	880	
	28W/54W	-	-	1180	
	35W/80W	-	-	1480	
T26/T8 	18W	-	-	620	
	30W	-	-	925	
	36W	-	-	1230	
	58W	-	-	1530	
TCS 	5W	290	-	110	
	7W	320	-	140	
	9W	350	-	170	
	11W	420	-	240	
TCL 	18W	480	660	230	
	24W	585	775	335	
	36W	675	855	425	
	55W	905	975	545	


Use Continuous lamp unit lengths plus a 50mm space between lamp units when using low brightness parabolic (VDU) louvres

Downlights		a	b	c
				
Lamp Type	W	a	b	c
MR11 fixed/adj 	20W/35W	120	205	290
MR16 adj 	20W/35W/50W	150	250	350


Unit lengths are approximate and may vary  
Specifications subject to change without notice




ends

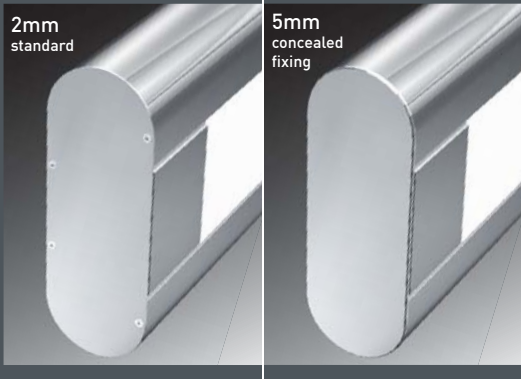


suspension

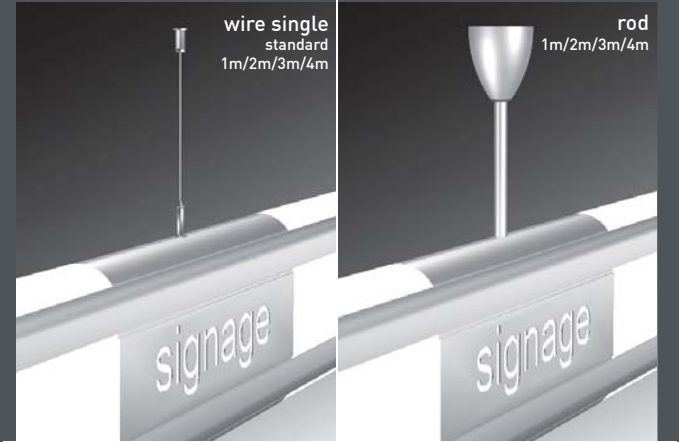

connectors

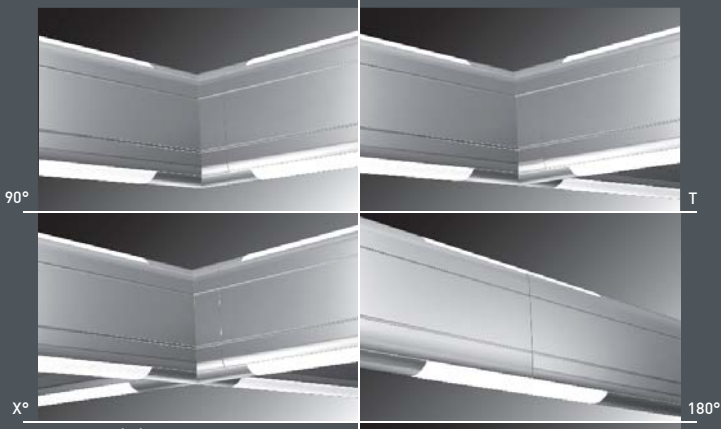

custom angled connectors available on request



space requirements

180° coupling is possible mid lamp unit depending on optic and control gear choice. 180° coupling is always preferable between lamp units. 150mm should be allowed.

post mount



packaging



7.5kg/m - 175 x 330 x (l + 200mm)

finish

- clear anodised
- matt textured silver
- matt textured white
- other colour

see [kliksystems.com](http://kliksystems.com) for current colour availability.

accessories




1 rear illuminated vinyl graphics

2 slotlight - for use in TV control/video editing suites

3 rear illuminated CNC engraved

other accessories available on request

photometrics



photometric files available for download from [kliksystems.com](http://kliksystems.com)