





EXIT

05



Office Foyer



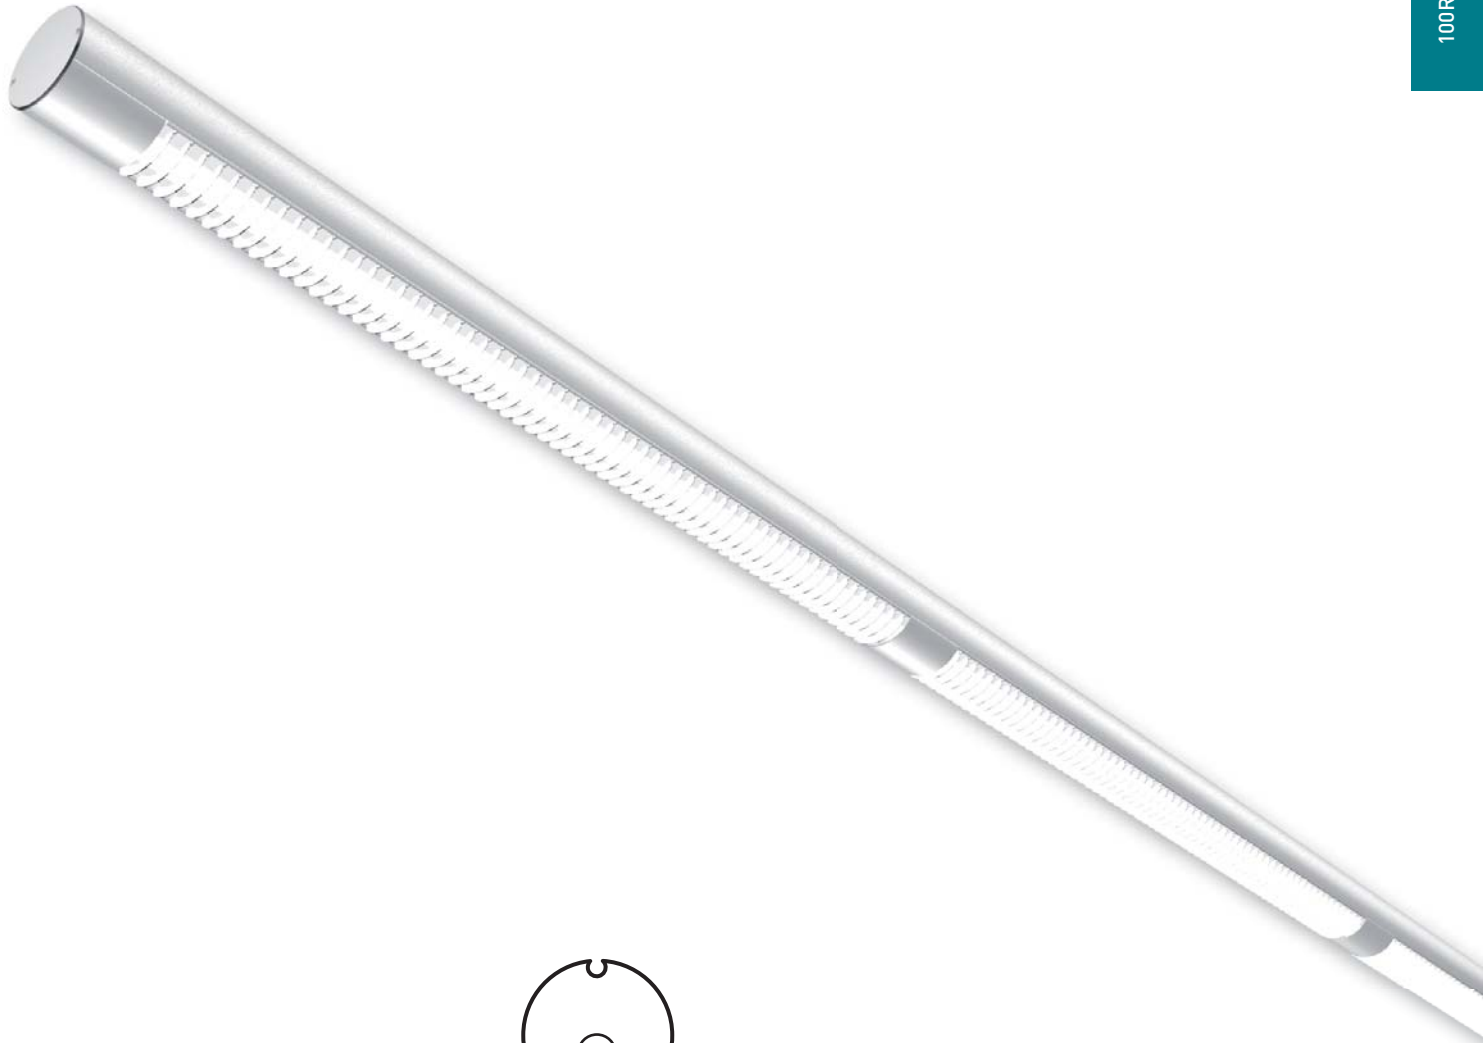

1 0 0 r o u n d



other configurations may be possible

diffusers



clear reeded acrylic







microsphere frosted acrylic




cross blade louvre

asymmetric option also available

lamp units

Fluorescent Lamps		a		b	
		non-continuous control gear between lamp ends		continuous control gear behind lamp	
		Lamp Unit Length (ECG)			
Lamp Type	W	a		b	
		non dim	dim		
 T16/T5	14W/24W	-	-	580	
	21W/39W	-	-	880	
	28W/54W	-	-	1180	
	35W/80W	-	-	1480	
 T26/T8	18W	-	-	620	
	30W	-	-	925	
	36W	-	-	1230	
	58W	-	-	1530	
 TCS	5W	290	-	110	
	7W	320	-	140	
	9W	350	-	170	
	11W	420	-	240	
 TCL	18W	480	660	230	
	24W	585	775	335	
	36W	675	855	425	
	55W	905	975	545	

Downlights		a	b	c
Lamp Type	W	a	b	c
MR11 fixed/adj	20W/35W	120	205	290
MR16 adj	20W/35W/50W	150	250	350

Linear		a	a
Lamp Type	W	a†	
 QT-DE	100W/200W 300W	750	

† Allows for heat dissipation, may vary.


Unit lengths are approximate and may vary
Specifications subject to change without notice

packaging




3.5kg/m - 125 x 125 x (l + 200mm)

finish



other finishes available on request

photometrics



photometric files available for download from kliksystems.com


ends



connectors



custom angled connectors available on request



space requirements

180° coupling is possible mid lamp unit depending on optic and control gear choice. 180° coupling is always preferable between lamp units. 150mm should be allowed.

accessories



- 1 adjustable low voltage spotlights
 - 2 adjustable low voltage MR11/MR16 downlights
 - 3 suspension tilt bracket
 - 4 power outlets
 - 5 emergency systems
- other accessories available on request


suspension




hollow box bracket



top wall bracket

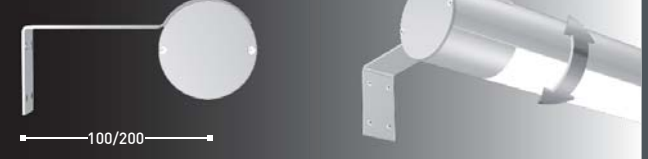

end wall bracket - pivot

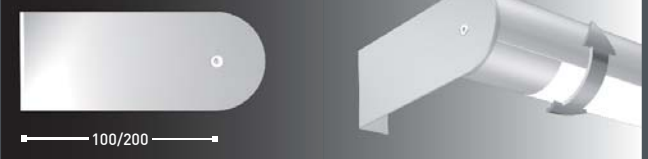

mid wall bracket - pivot



hollow wall bracket - end



hollow wall bracket - mid



hollow wall bracket - central fixed



100 round pre-configured



1. Choose your item and lamp unit configuration from the tables on the following pages.

2-6 Select your preferred options from the choices 2 to 6 on the right

7. See an example product specification at the bottom of the page

1. part no.

choose the desired configuration from the tables on the following pages

Part No.	Lamp Unit	Optic	Dimming	Suspension	End Plate	Colour	Length
100R105	2x1/28W	MSF or CBL	31	wire single	2mm (std) visible fixings	clear anodised 61	2640
100R106	2x1/35W	MSF or CBL	32	rod	5mm concealed fixings	other colour (refer to website) 64	3240
100R107	2x1/54W	MSF or CBL	33				2640

2. optic (direct)



microsphere frosted acrylic (MSF) - 21

cross blade louvre (CBL) - 22

3. dimming



non-dim 31
1-10V 32
DSI 33
DALI 34

4. suspension



wire single

1m - 411
2m - 412
3m - 413
4m - 414



rod

600mm - 441
1.2m - 442

5. end



end plate 2mm (std) visible fixings

51




end plate 5mm concealed fixings

52

6. colour finish



7. example

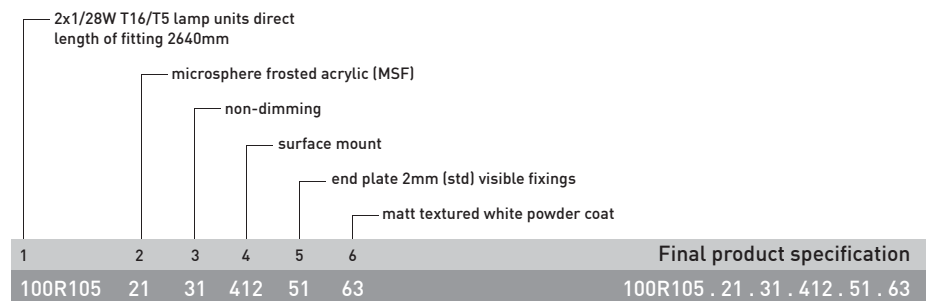


Fluorescent lamps will be supplied in colour 840 unless specified otherwise.



Lamp orientation legend

lamp colours represent separate switch wiring ■ ■ ■

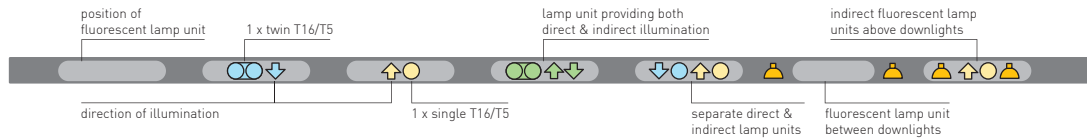

■ Data is approximate and subject to change without notice. Product images are representations only - actual product may vary.

part no.	direct	downlight	indirect	optic direct	optic indirect	length (mm)	weight (kgs)	pack size h x w x l (mm)			cubic m ³
100R101	1x1/28W			MSF or CBL		1380	4.8	125	125	1580	0.025
100R102	1x1/35W			MSF or CBL		1680	5.9	125	125	1880	0.029
100R103	1x1/54W			MSF or CBL		1380	4.8	125	125	1580	0.025
100R104	1x1/80W			MSF or CBL		1680	5.9	125	125	1880	0.029
100R105	2x1/28W			MSF or CBL		2640	9.2	125	125	2840	0.044
100R106	2x1/35W			MSF or CBL		3240	11.3	125	125	3440	0.054
100R107	2x1/54W			MSF or CBL		2640	9.2	125	125	2840	0.044
100R108	2x1/80W			MSF or CBL		3240	11.3	125	125	3440	0.054
100R109	3x1/28W			MSF or CBL		3900	13.7	125	125	4100	0.064
100R110	3x1/35W			MSF or CBL		4800	16.8	125	125	5000	0.078
100R111	3x1/54W			MSF or CBL		3900	13.7	125	125	4100	0.064
100R112	3x1/80W			MSF or CBL		4800	16.8	125	125	5000	0.078

If you don't see a configuration you like, no problem, **KLIK** can custom make to your unique specifications.

Just turn back to the **made to measure** pages and follow the specification instructions, or call your local **KLIK** representative.



100 Round · Charlie Brown

preconfigured

100R

