



THE OPTICAL
EDGE

fruition

fruition


fruition

fruition


Parishes
JEWELLERS

AVEDA



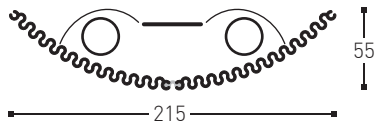

1 4 5 w a v e

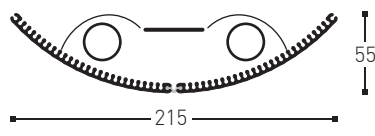

1 4 5 s c a l l o p



other configurations may be possible

diffusers - wave



clear reeded acrylic


diffusers - scallop




clear reeded acrylic

lamp units

Fluorescent Lamps




		Lamp Unit Length (ECG)
Lamp Type	W	a
 T16/T5	14W/24W	580
	21W/39W	880
	28W/54W	1180
	35W/80W	1480

Unit lengths are approximate and may vary
Specifications subject to change without notice


145W/S




ends

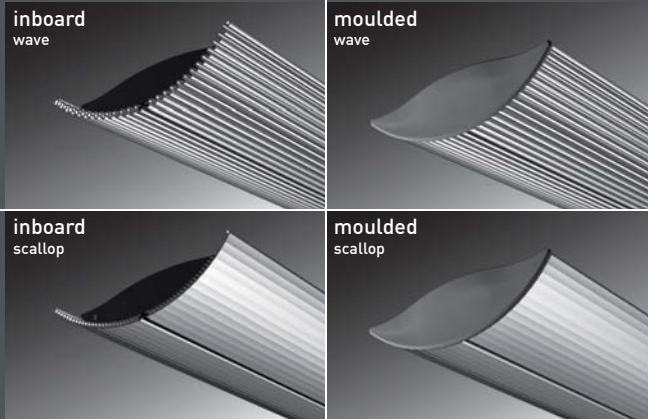

connectors

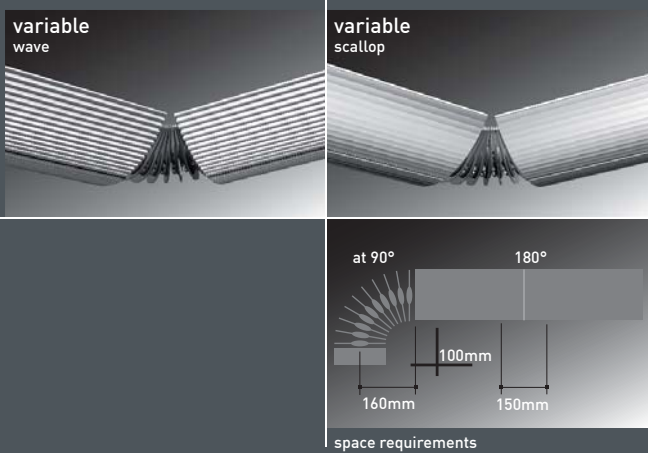

suspension

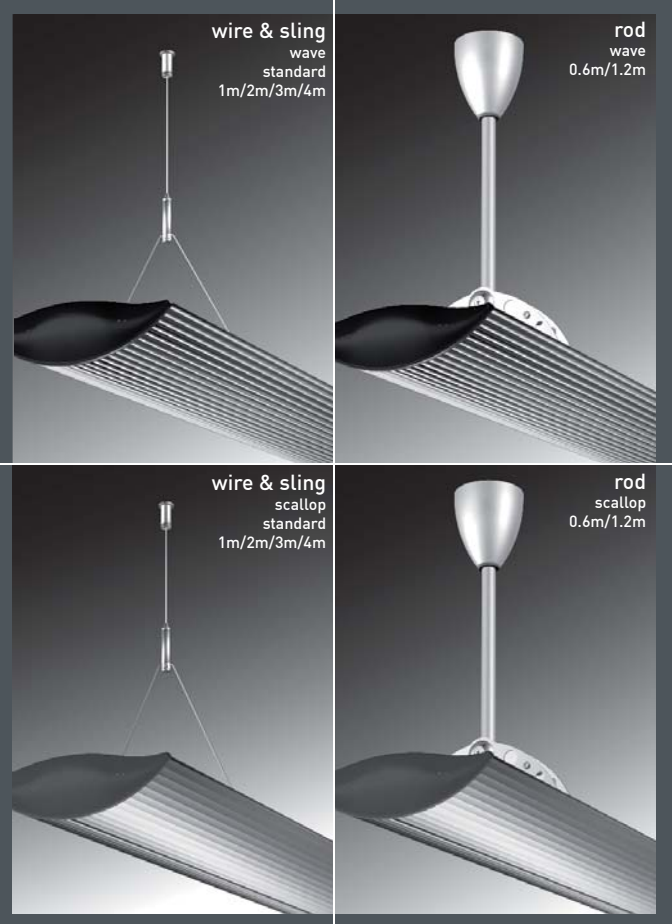


145W/5

packaging




5.0kg/m - 120 x 265 x (l + 200mm)

photometrics



finish

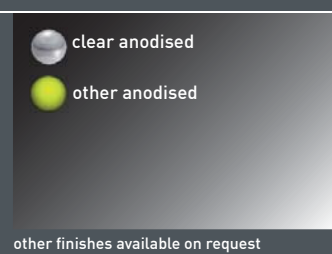

145 wave/scallop pre-configured



1. Choose your item and lamp unit configuration from the tables on the following pages.

2-6 Select your preferred options from the choices 2 to 6 on the right

7. See an example product specification at the bottom of the page

1. part no.

choose the desired configuration from the tables on the following pages

145W105		2x2/28W	CR	2670
145W106		2x2/35W	CR	3270
145W107		2x2/54W	CR	2670

2. optic (indirect)



clear reeded acrylic (CR) - 25

3. dimming



non-dim 31
1-10V 32
DSI 33
DALI 34

4. suspension



wire sling

1m - 421
2m - 422
3m - 423
4m - 424



rod

600mm - 441
1.2m - 442

5. end



end plate inboard

54



end plate moulded


55

6. colour finish

clear anodised 61



7. example

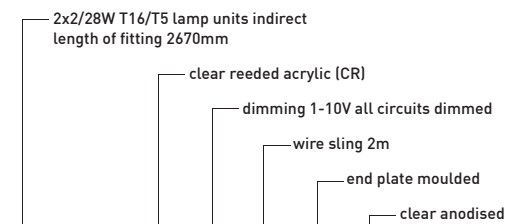


						Final product specification
1	2	3	4	5	6	145W105 . 25 . 32 . 422 . 55 . 61

Fluorescent lamps will be supplied in colour 840 unless specified otherwise.



Lamp orientation legend

lamp colours represent separate switch wiring ■ ■ ■ ■

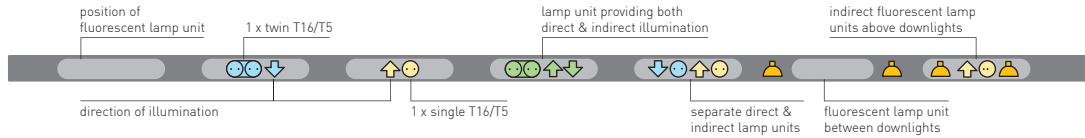

■ Data is approximate and subject to change without notice. Product images are representations only - actual product may vary.

part no.	direct	downlight	indirect	optic direct	optic indirect	length (mm)	weight (kgs)	pack size h x w x l (mm)			cubic m ³
145W101			1x2/28W		CR	1480	7.4	120	265	1680	0.053
145W102			1x2/35W		CR	1780	8.9	120	265	1980	0.063
145W103			1x2/54W		CR	1480	7.4	120	265	1680	0.053
145W104			1x2/80W		CR	1780	8.9	120	265	1980	0.063
145W105			2x2/28W		CR	2670	13.4	120	265	2870	0.091
145W106			2x2/35W		CR	3270	16.4	120	265	3470	0.110
145W107			2x2/54W		CR	2670	13.4	120	265	2870	0.091
145W108			2x2/80W		CR	3270	16.4	120	265	3470	0.110
145W109			3x2/28W		CR	3860	19.3	120	265	4060	0.129
145W110			3x2/54W		CR	3860	19.3	120	265	4060	0.129
145S101			1x2/28W		CR	1480	7.4	120	265	1680	0.053
145S102			1x2/35W		CR	1780	8.9	120	265	1980	0.063
145S103			1x2/54W		CR	1480	7.4	120	265	1680	0.053
145S104			1x2/80W		CR	1780	8.9	120	265	1980	0.063
145S105			2x2/28W		CR	2670	13.4	120	265	2870	0.091
145S106			2x2/35W		CR	3270	16.4	120	265	3470	0.110
145S107			2x2/54W		CR	2670	13.4	120	265	2870	0.091
145S108			2x2/80W		CR	3270	16.4	120	265	3470	0.110
145S109			3x2/28W		CR	3860	19.3	120	265	4060	0.129
145S110			3x2/54W		CR	3860	19.3	120	265	4060	0.129

preconfigured

145W/5

Consider transport and site access when ordering long lengths.

If you don't see a configuration you like, no problem, **KLIK** can custom make to your unique specifications.

Just turn back to the **made to measure** pages and follow the specification instructions, or call your local **KLIK** representative.

