






Macquarie University

150 deep
cornice

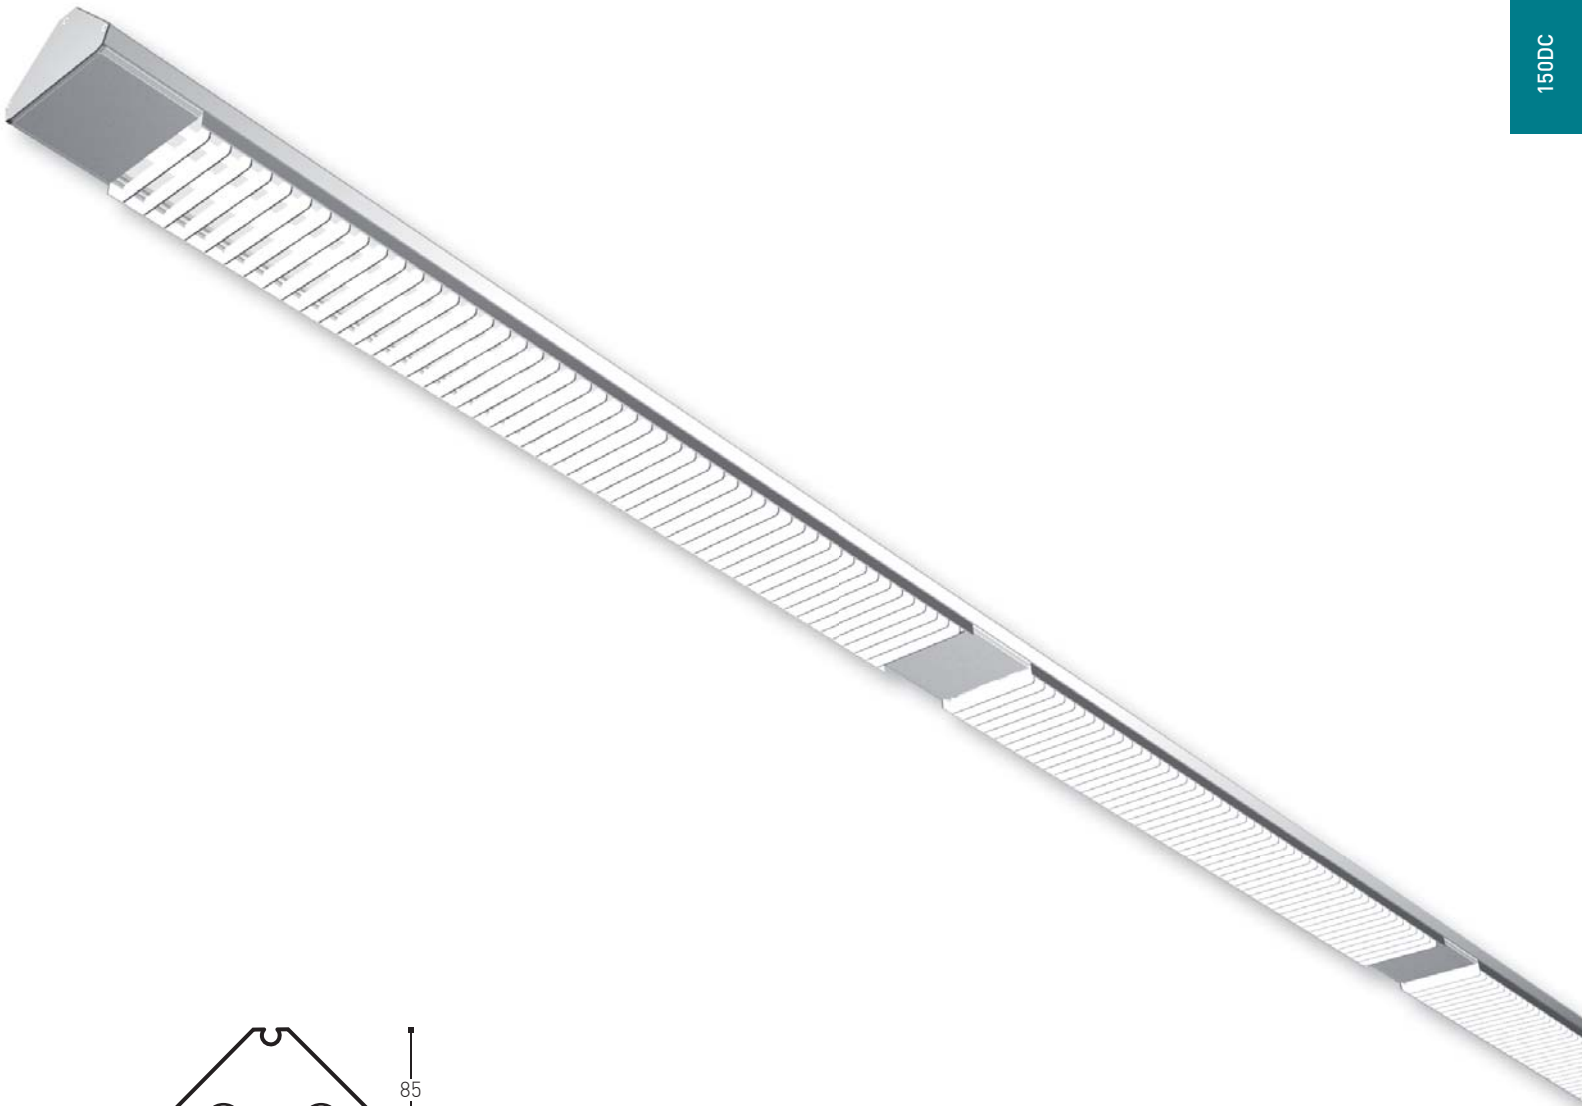

1 5 0 d e e p c o r n i c e

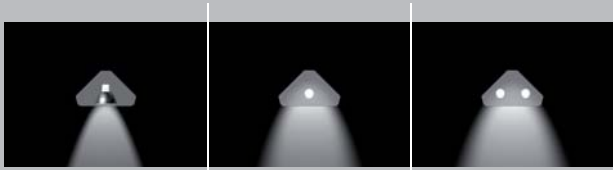

other configurations may be possible

diffusers



clear reeded acrylic



microsphere frosted acrylic



cross blade louvre







parabolic louvre semi-specular



asymmetric option also available


lamp units



Fluorescent Lamps		Lamp Unit Length (ECG)		
Lamp Type	W	a		b
		non dim	dim	
 T16/T5	14W/24W	-	-	580
	21W/39W	-	-	880
	28W/54W	-	-	1180
	35W/80W	-	-	1480
 T26/T8	18W	-	-	620
	30W	-	-	925
	36W	-	-	1230
	58W	-	-	1530
 TCS	5W	290	-	110
	7W	320	-	140
	9W	350	-	170
	11W	420	-	240
 TCL	18W	480	660	230
	24W	585	775	335
	36W	675	855	425
	55W	905	975	545

Use Continuous lamp unit lengths plus a 50mm space between lamp units when using low brightness parabolic (VDU) louvres

Downlights		a	b	c
MR11 fixed/adj	 20W/35W	120	205	290
MR16 adj	 20W/35W/50W	150	250	350


Linear		a
QT-DE	 100W/200W 300W	750

† Allows for heat dissipation, may vary.

Unit lengths are approximate and may vary
Specifications subject to change without notice



ends

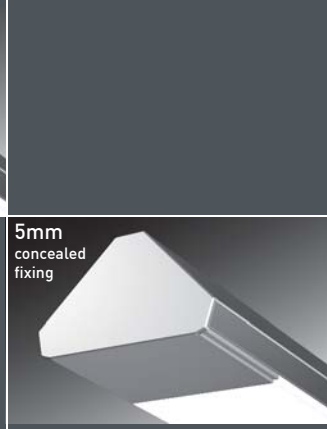


suspension




connectors



custom angled connectors available on request



space requirements
180° coupling is possible mid lamp unit depending on optic and control gear choice. 180° coupling is always preferable between lamp units. 150mm should be allowed.

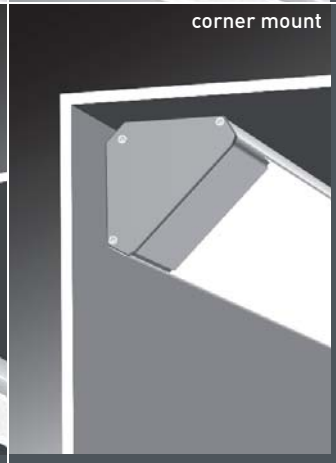

accessories



1 adjustable low voltage MR16 downlights
2 power outlets

3 concealed PA speaker systems.
4 emergency systems
other accessories available on request

finish

- clear anodised
- matt textured silver
- matt textured white
- other colour


see kliksystems.com for current colour availability.

packaging



3.8kg/m - 130 x 190 x (l + 200mm)

photometrics



photometric files available for download from kliksystems.com

150 deep cornice pre-configured



1. Choose your item and lamp unit configuration from the tables on the following pages.

2-6 Select your preferred options from the choices 2 to 6 on the right


7. See an example product specification at the bottom of the page

1. part no.

choose the desired configuration from the tables on the following pages

150DC117	2x2/28W	3x1/MR16 50W		MSF or CBL		2940
150DC118	2x2/35W	3x1/MR16 50W		MSF or CBL		3540
150DC119	2x2/54W	3x1/MR16 50W		MSF or CBL		2940

2. optic (direct)

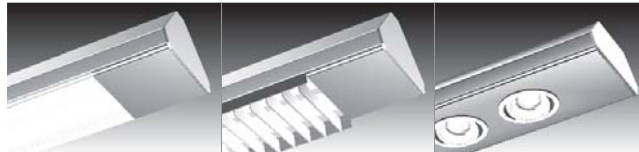

microsphere frosted acrylic (MSF) - 21

cross blade louvre (CBL) - 22

no optic direct downlights only - 24

3. dimming



non-dim 31
1-10V 32
DSI 33
DALI 34

specify circuit(s) to dim

4. suspension



wire single
1m - 411
2m - 412
3m - 413
4m - 414



rod
600mm - 441
1.2m - 442



surface mount
451

5. end



end plate 2mm (std) visible fixings
51




end plate 5mm concealed fixings
52

6. colour finish



7. example

2x2/28W T16/T5 lamp units and 3x1/MR16 50W downlights direct length of fitting 2940mm

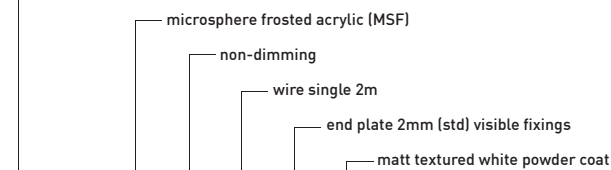


1	2	3	4	5	6	Final product specification
150DC117	21	31	412	51	63	150DC117 . 21 . 31 . 412 . 51 . 63

Fluorescent lamps will be supplied in colour 840 unless specified otherwise, please specify wattage and beam angle of downlights. All downlights are adjustable where possible



Lamp orientation legend

Lamp colours represent separate switch wiring ■ ■ ■ ■

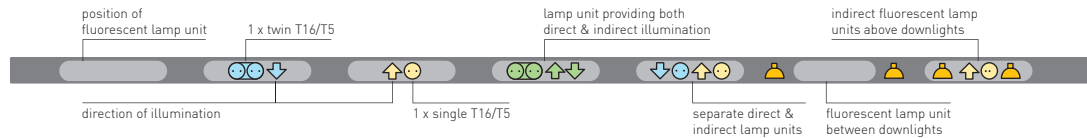

■ Data is approximate and subject to change without notice. Product images are representations only - actual product may vary.

part no.	direct	downlight	indirect	optic direct	optic indirect	length (mm)	weight (kgs)	pack size (mm)			cubic m ³
								h	w	l	
150DC101	1x2/28W			MSF or CBL		1380	5.2	130	190	1580	0.039
150DC102	1x2/35W			MSF or CBL		1680	6.4	130	190	1880	0.046
150DC103	1x2/54W			MSF or CBL		1380	5.2	130	190	1580	0.039
150DC104	1x2/80W			MSF or CBL		1680	6.4	130	190	1880	0.046
150DC105	2x2/28W			MSF or CBL		2640	10.0	130	190	2840	0.070
150DC106	2x2/35W			MSF or CBL		3240	12.3	130	190	3440	0.085
150DC107	2x2/54W			MSF or CBL		2640	10.0	130	190	2840	0.070
150DC108	2x2/80W			MSF or CBL		3240	12.3	130	190	3440	0.085
150DC109	3x2/28W			MSF or CBL		3900	14.8	130	190	4100	0.101
150DC110	3x2/35W			MSF or CBL		4800	18.2	130	190	5000	0.124
150DC111	3x2/54W			MSF or CBL		3900	14.8	130	190	4100	0.101
150DC112	3x2/80W			MSF or CBL		4800	18.2	130	190	5000	0.124
150DC113	1x2/28W	2x1/MR16 50W		MSF or CBL		1580	6.0	130	190	1780	0.044
150DC114	1x2/35W	2x1/MR16 50W		MSF or CBL		1880	7.1	130	190	2080	0.051
150DC115	1x2/54W	2x1/MR16 50W		MSF or CBL		1580	6.0	130	190	1780	0.044
150DC116	1x2/80W	2x1/MR16 50W		MSF or CBL		1880	7.1	130	190	2080	0.051
150DC117	2x2/28W	3x1/MR16 50W		MSF or CBL		2940	11.2	130	190	3140	0.078
150DC118	2x2/35W	3x1/MR16 50W		MSF or CBL		3540	13.5	130	190	3740	0.092
150DC119	2x2/54W	3x1/MR16 50W		MSF or CBL		2940	11.2	130	190	3140	0.078
150DC120	2x2/80W	3x1/MR16 50W		MSF or CBL		3540	13.5	130	190	3740	0.092
150DC121	3x2/28W	4x1/MR16 50W		MSF or CBL		4300	16.3	130	190	4500	0.111
150DC122	3x2/35W	4x1/MR16 50W		MSF or CBL		5200	19.8	130	190	5400	0.133
150DC123	3x2/54W	4x1/MR16 50W		MSF or CBL		4300	16.3	130	190	4500	0.111
150DC124	3x2/80W	4x1/MR16 50W		MSF or CBL		5200	19.8	130	190	5400	0.133
150DC125	1x2/28W	2x2/MR16 50W		MSF or CBL		1780	6.8	130	190	1980	0.049
150DC126	1x2/35W	2x2/MR16 50W		MSF or CBL		2080	7.9	130	190	2280	0.056
150DC127	1x2/54W	2x2/MR16 50W		MSF or CBL		1780	6.8	130	190	1980	0.049
150DC128	1x2/80W	2x2/MR16 50W		MSF or CBL		2080	7.9	130	190	2280	0.056

preconfigured

150DC

Consider transport and site access when ordering long lengths.

If you don't see a configuration you like, no problem, **KLIK** can custom make to your unique specifications.

Just turn back to the **made to measure** pages and follow the specification instructions, or call your local **KLIK** representative.



part no.	direct	downlight	indirect	optic direct	optic indirect	length (mm)	weight (kgs)	pack size h x w x l (mm)			cubic m ³
150DC129	2x2/28W	3x2/MR16 50W		MSF or CBL		3240	12.3	130	190	3440	0.085
150DC130	2x2/35W	3x2/MR16 50W		MSF or CBL		3840	14.6	130	190	4040	0.100
150DC131	2x2/54W	3x2/MR16 50W		MSF or CBL		3240	12.3	130	190	3440	0.085
150DC132	2x2/80W	3x2/MR16 50W		MSF or CBL		3840	14.6	130	190	4040	0.100
150DC133	3x2/28W	4x2/MR16 50W		MSF or CBL		4700	17.9	130	190	4900	0.121
150DC134	3x2/35W	4x2/MR16 50W		MSF or CBL		5600	21.3	130	190	5800	0.143
150DC135	3x2/54W	4x2/MR16 50W		MSF or CBL		4700	17.9	130	190	4900	0.121
150DC136	3x2/80W	4x2/MR16 50W		MSF or CBL		5600	21.3	130	190	5800	0.143
150DC137		Twin MR16 50W				250	1.0	130	190	450	0.011
150DC138		Triple MR16 50W				350	1.3	130	190	550	0.014
150DC139		Quad MR16 50W				450	1.7	130	190	650	0.016
150DC140		2x1/MR16 50W				710	2.7	130	190	910	0.022
150DC141		3x1/MR16 50W				1210	4.6	130	190	1410	0.035
150DC142		4x1/MR16 50W				1710	6.5	130	190	1910	0.047
150DC143		2x2/MR16 50W				910	3.5	130	190	1110	0.027
150DC144		3x2/MR16 50W				1510	5.7	130	190	1710	0.042
150DC145		4x2/MR16 50W				2110	8.0	130	190	2310	0.057

control gear for twin, triple and quad fittings to be ceiling mounted or located in ceiling space

If you don't see a configuration you like, no problem, **KLIK** can custom make to your unique specifications.

Just turn back to the **made to measure** pages and follow the specification instructions, or call your local **KLIK** representative.

