


1 7 0 r e c e s s e d



other configurations may be possible


## diffusers

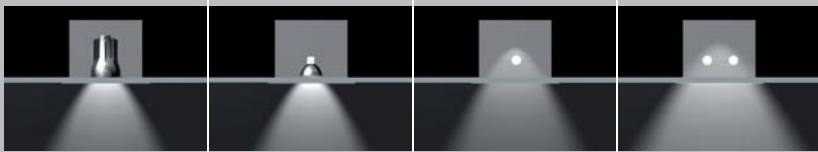


clear reeded acrylic



microsphere frosted acrylic

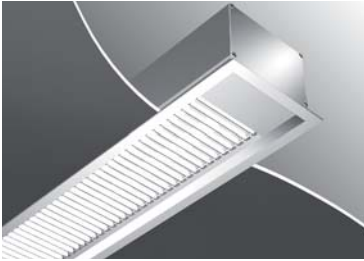



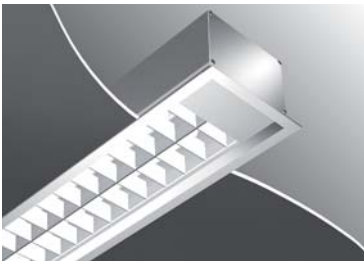

cross blade louvre









low brightness parabolic louvre




asymmetric option also available

## lamp units

Fluorescent Lamps		a		b	
		non-continuous control gear between lamp ends		continuous control gear behind lamp	
Lamp Unit Length (ECG)					
Lamp Type	W	a		b	
		non dim	dim		
 T16/T5	14W/24W	-	-	580	
	21W/39W	-	-	880	
	28W/54W	-	-	1180	
	35W/80W	-	-	1480	
 T26/T8	18W	-	-	620	
	30W	-	-	925	
	36W	-	-	1230	
	58W	-	-	1530	
 TCS	5W	290	-	110	
	7W	320	-	140	
	9W	350	-	170	
	11W	420	-	240	
 TCL	18W	480	660	230	
	24W	585	775	335	
	36W	675	855	425	
	55W	905	975	545	

Use continuous lamp unit lengths plus a 50mm space between lamp units when using low brightness parabolic (VDU) louvres

Downlights		a	b	c
Lamp Type	W	a	b	c
MR11 fixed/adj	 20W/35W	120	205	290
MR16 adj	 20W/35W/50W	150	250	350
HIT PAR16	 35W	200	365	530
AR111	 50W/75W/100W	200	365	530
CDM R111	 35W/70W	200	365	530
HIT	 20W/35W	200	365	530

Linear		a	a
Lamp Type	W	a†	
HIT-DE adj	 70W/150W	750	
HIT-DE fixed	 70W/150W	750	
QT-DE	 100W/200W 300W	750	



† Allows for control gear and heat dissipation, may vary.

Unit lengths are approximate and may vary  
Specifications subject to change without notice


ends



connectors

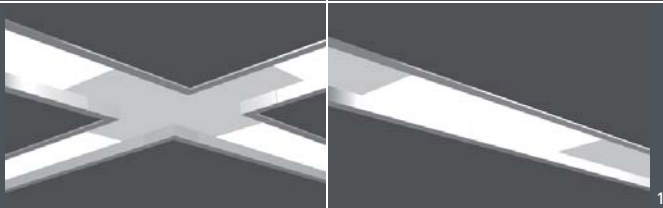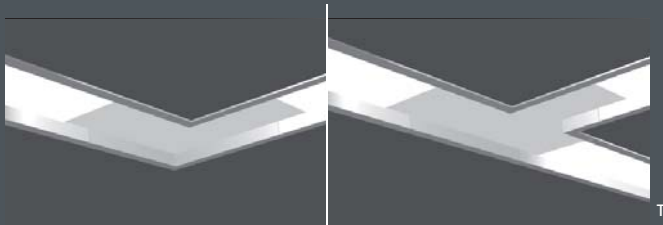

custom angled connectors available on request



space requirements

180° coupling is possible mid lamp unit depending on optic and control gear choice. 180° coupling is always preferable between lamp units. 150mm should be allowed.

photometrics



photometric files available for download from [kliksystems.com](http://kliksystems.com)

finish

- clear anodised
- matt textured silver
- matt textured white
- other colour


see [kliksystems.com](http://kliksystems.com) for current colour availability.

packaging




7.6kg/m - 210 x 260 x (l + 200mm)

suspension

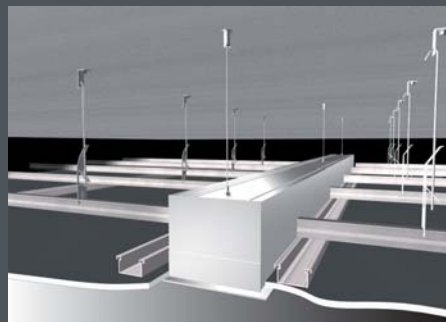

wire suspended from overhead structure

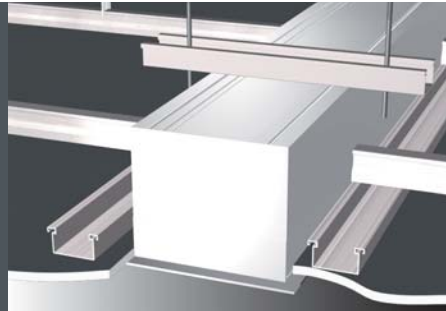


direct fixed to overhead structure standard



suspended from bracket (on application)

accessories

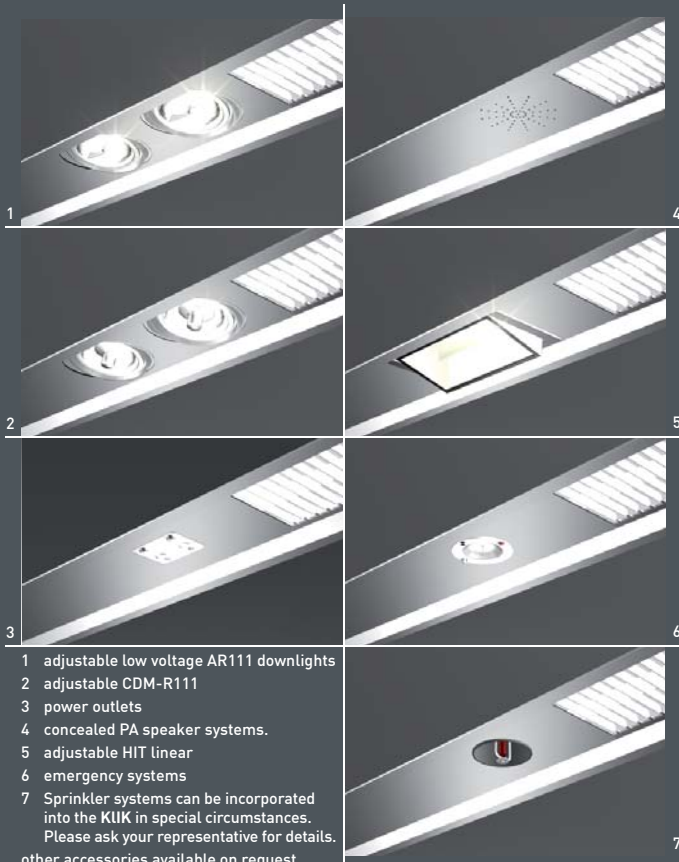

- 1 adjustable low voltage AR111 downlights
  - 2 adjustable CDM-R111
  - 3 power outlets
  - 4 concealed PA speaker systems.
  - 5 adjustable HIT linear
  - 6 emergency systems
  - 7 Sprinkler systems can be incorporated into the KLIK in special circumstances. Please ask your representative for details.
- other accessories available on request

# 170 recessed pre-configured



## 1. part no.

choose the desired configuration from the tables on the following pages

170REC117	2x2/28W	3x1/AR111 or CDM-R111		MSF or CBL or VDU	3720
170REC118	2x2/35W	3x1/AR111 or CDM-R111		MSF or CBL or VDU	4320
170REC119	2x2/54W	3x1/AR111 or CDM-R111		MSF or CBL or VDU	3720

1. Choose your item and lamp unit configuration from the tables on the following pages.

## 2. optic (direct)



microsphere frosted acrylic (MSF) - 21      cross blade louvre (CBL) - 22      low brightness parabolic louvre (VDU) - 23      no optic direct downlight only - 24

2-6 Select your preferred options from the choices 2 to 6 on the right


## 3. dimming



non-dim 31  
1-10V 32  
DSI 33  
DALI 34  
specify circuit(s) to dim

7. See an example product specification at the bottom of the page

## 4. suspension

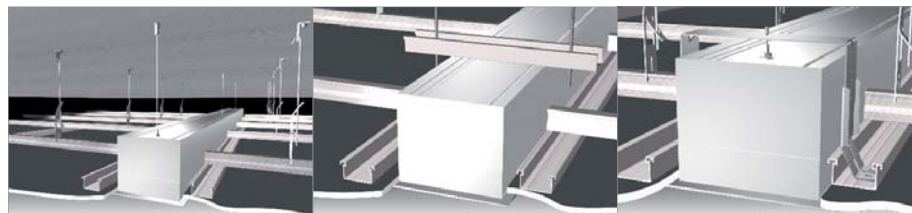

wire suspended from overhead structure - 461      direct fixed to overhead structure - 462      suspended from bracket - 463

## 5. end



end plate 3mm (std)

51

## 6. colour finish




clear anodised 61

other colour (refer to website) 64

matt textured silver powder coat 62


matt textured white powder coat 63

## 7. example

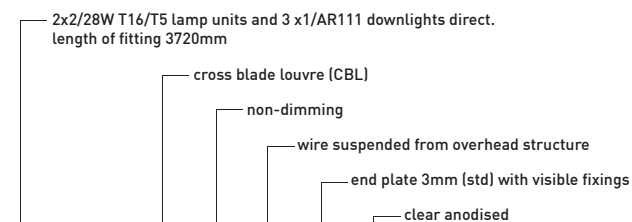

1	2	3	4	5	6	<b>Final product specification</b>
170REC117	22	31	461	51	61	170REC117 . 22 . 31 . 461 . 51 . 61

Fluorescent lamps will be supplied in colour 840 unless specified otherwise, please specify wattage and beam angle of downlights. All downlights are adjustable where possible

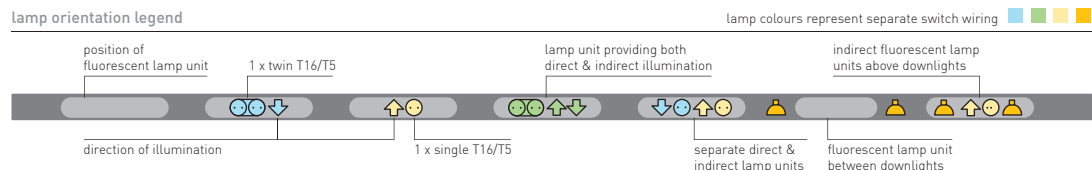

■ Data is approximate and subject to change without notice. Product images are representations only - actual product may vary.

part no.	direct	downlight	indirect	optic direct	optic indirect	* length (mm)	weight (kgs)	pack size h x w x l (mm)			cubic m <sup>3</sup>
170REC101	1x2/28W			MSF or CBL or VDU		1410	10.7	210	260	1610	0.088
170REC102	1x2/35W			MSF or CBL or VDU		1710	13.0	210	260	1910	0.104
170REC103	1x2/54W			MSF or CBL or VDU		1410	10.7	210	260	1610	0.088
170REC104	1x2/80W			MSF or CBL or VDU		1710	13.0	210	260	1910	0.104
170REC105	2x2/28W			MSF or CBL or VDU		2670	20.3	210	260	2870	0.157
170REC106	2x2/35W			MSF or CBL or VDU		3270	24.9	210	260	3470	0.189
170REC107	2x2/54W			MSF or CBL or VDU		2670	20.3	210	260	2870	0.157
170REC108	2x2/80W			MSF or CBL or VDU		3270	24.9	210	260	3470	0.189
170REC109	3x2/28W			MSF or CBL or VDU		3930	29.9	210	260	4130	0.225
170REC110	3x2/35W			MSF or CBL or VDU		4830	36.7	210	260	5030	0.275
170REC111	3x2/54W			MSF or CBL or VDU		3930	29.9	210	260	4130	0.225
170REC112	3x2/80W			MSF or CBL or VDU		4830	36.7	210	260	5030	0.275
170REC113	1x2/28W	2x1/AR111 or CDM-R111		MSF or CBL or VDU		2110	16.0	210	260	2310	0.126
170REC114	1x2/35W	2x1/AR111 or CDM-R111		MSF or CBL or VDU		2410	18.3	210	260	2610	0.143
170REC115	1x2/54W	2x1/AR111 or CDM-R111		MSF or CBL or VDU		2110	16.0	210	260	2310	0.126
170REC116	1x2/80W	2x1/AR111 or CDM-R111		MSF or CBL or VDU		2410	18.3	210	260	2610	0.143
170REC117	2x2/28W	3x1/AR111 or CDM-R111		MSF or CBL or VDU		3720	28.3	210	260	3920	0.214
170REC118	2x2/35W	3x1/AR111 or CDM-R111		MSF or CBL or VDU		4320	32.8	210	260	4520	0.247
170REC119	2x2/54W	3x1/AR111 or CDM-R111		MSF or CBL or VDU		3720	28.3	210	260	3920	0.214
170REC120	2x2/80W	3x1/AR111 or CDM-R111		MSF or CBL or VDU		4320	32.8	210	260	4520	0.247
170REC121	3x2/28W	4x1/AR111 or CDM-R111		MSF or CBL or VDU		5330	40.5	210	260	5530	0.302
170REC122	3x2/54W	4x1/AR111 or CDM-R111		MSF or CBL or VDU		5330	40.5	210	260	5530	0.302
170REC123	1x2/28W	2x2/AR111 or CDM-R111		MSF or CBL or VDU		2440	18.5	210	260	2640	0.144
170REC124	1x2/35W	2x2/AR111 or CDM-R111		MSF or CBL or VDU		2740	20.8	210	260	2940	0.161
170REC125	1x2/54W	2x2/AR111 or CDM-R111		MSF or CBL or VDU		2440	18.5	210	260	2640	0.144
170REC126	1x2/80W	2x2/AR111 or CDM-R111		MSF or CBL or VDU		2740	20.8	210	260	2940	0.161

\* length includes flange (15 x 2 = 30mm O/A)

Consider transport and site access when ordering long lengths.

If you don't see a configuration you like, no problem, **KLIK** can custom make to your unique specifications.

Just turn back to the **made to measure** pages and follow the specification instructions, or call your local **KLIK** representative.

part no.	direct	downlight	indirect	optic direct	optic indirect	* length (mm)	weight (kgs)	pack size h x w x l (mm)	cubic m <sup>3</sup>
170REC127	2x2/28W	3x2/AR111 or CDM-R111		MSF or CBL or VDU		4210	32.0	210 260 4410	0.241
170REC128	2x2/35W	3x2/AR111 or CDM-R111		MSF or CBL or VDU		4810	36.6	210 260 5010	0.274
170REC129	2x2/54W	3x2/AR111 or CDM-R111		MSF or CBL or VDU		4210	32.0	210 260 4410	0.241
170REC130	2x2/80W	3x2/AR111 or CDM-R111		MSF or CBL or VDU		4810	36.6	210 260 5010	0.274



170REC131 Twin AR111 or CDM-R111

460 3.5 210 260 660 0.036



170REC132 Triple AR111 or CDM-R111

640 4.9 210 260 840 0.046



170REC133 Quad AR111 or CDM-R111

820 6.2 210 260 1020 0.056



170REC134 2x1/AR111 or CDM-R111

1240 9.4 210 260 1440 0.079



170REC135 3x1/AR111 or CDM-R111

2040 15.5 210 260 2240 0.122



170REC136 4x1/AR111 or CDM-R111

2840 21.6 210 260 3040 0.166



170REC137 2x2/AR111 or CDM-R111

1570 11.9 210 260 1770 0.097



170REC138 3x2/AR111 or CDM-R111

2540 19.3 210 260 2740 0.150



170REC139 4x2/AR111 or CDM-R111

3500 26.6 210 260 3700 0.202

control gear for twin, triple and quad fittings to be ceiling mounted or located in ceiling space

If you don't see a configuration you like, no problem, **KLIK** can custom make to your unique specifications.

Just turn back to the **made to measure** pages and follow the specification instructions, or call your local **KLIK** representative.

\* length includes flange (15 x 2 = 30mm O/A)

