




dedece Showroom

180  
u p l i g h t e r



1 8 0 u p l i g h t e r



other configurations may be possible

diffusers





clear reeded acrylic (indirect)



microsphere frosted acrylic (indirect)

lamp units

Fluorescent Lamps		 non-continuous control gear between lamp ends		 continuous control gear behind lamp	
		Lamp Unit Length (ECG)			
Lamp Type	W	a		b	
		non dim	dim		
T16/T5 	14W/24W	-	-	580	
	21W/39W	-	-	880	
	28W/54W	-	-	1180	
	35W/80W	-	-	1480	
T26/T8 	18W	980	1050	-	
	30W	1285	1355	-	
	36W	1590	1660	-	
	58W	1890	1960	-	

Unit lengths are approximate and may vary  
 Specifications subject to change without notice

ends



2mm  
standard



5mm  
concealed  
fixing

connectors



90°



T




X



180°

custom angled connectors  
available on request



space requirements

180° coupling is possible mid lamp unit  
depending on optic and control gear choice.  
180° coupling is always preferable between  
lamp units. 150mm should be allowed.

accessories



concealed PA speaker systems.  
other accessories available on request

suspension



wire & sling  
standard  
1m/2m/3m/4m



wire twin  
1m/2m/3m/4m







rod  
1m/2m/3m/4m

packaging




6.0kg/m - 120 x 265 x (l + 200mm)

finish

-  clear anodised
-  matt textured silver
-  matt textured white
-  other colour

see [kliksystems.com](http://kliksystems.com) for current colour  
availability.

photometrics



photometric files available for  
download from [kliksystems.com](http://kliksystems.com)

# 180uplighter pre-configured



1. Choose your item and lamp unit configuration from the tables on the following pages.

2-6 Select your preferred options from the choices 2 to 6 on the right


7. See an example product specification at the bottom of the page

## 1. part no.

choose the desired configuration from the tables on the following pages

180UP105	2x2/28W	CR or MSF 2560
180UP106	2x2/35W	CR or MSF 3160
180UP107	2x2/54W	CR or MSF 2560

## 2. optic (indirect)

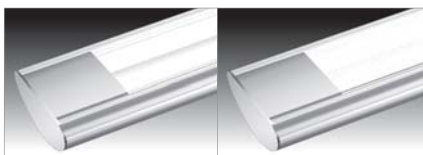

clear reeded acrylic (CR) - 21

microsphere frosted acrylic (MSF) - 22

## 3. dimming



non-dim 31  
1-10V 32  
DSI 33  
DALI 34

## 4. suspension



wire sling

1m - 421  
2m - 422  
3m - 423  
4m - 424



wire twin

1m - 431  
2m - 432  
3m - 433  
4m - 434



rod

600mm - 441  
1.2m - 442

## 5. end




end plate 2mm (std) visible fixings  
51




end plate 5mm concealed fixings  
52

## 6. colour finish



## 7. example

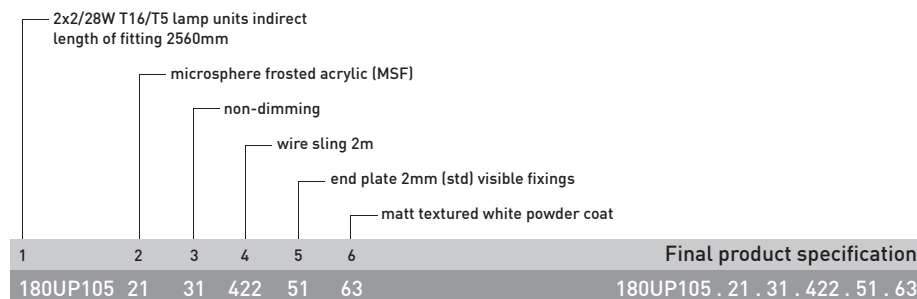


Fluorescent lamps will be supplied in colour 840 unless specified otherwise.



lamp orientation legend

Lamp colours represent separate switch wiring ■ ■ ■

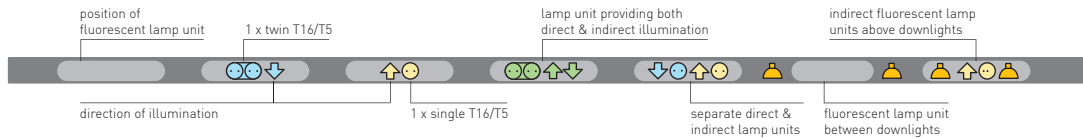

■ Data is approximate and subject to change without notice. Product images are representations only - actual product may vary.

part no.	direct	downlight	indirect	optic direct	optic indirect	length (mm)	weight (kgs)	pack size h x w x l (mm)			cubic m <sup>3</sup>
180UP101			1x2/28W		CR or MSF	1380	8.3	120	265	1580	0.050
180UP102			1x2/35W		CR or MSF	1680	10.1	120	265	1880	0.060
180UP103			1x2/54W		CR or MSF	1380	8.3	120	265	1580	0.050
180UP104			1x2/80W		CR or MSF	1680	10.1	120	265	1880	0.060
180UP105			2x2/28W		CR or MSF	2560	15.4	120	265	2760	0.088
180UP106			2x2/35W		CR or MSF	3160	19.0	120	265	3360	0.107
180UP107			2x2/54W		CR or MSF	2560	15.4	120	265	2760	0.088
180UP108			2x2/80W		CR or MSF	3160	19.0	120	265	3360	0.107
180UP109			3x2/28W		CR or MSF	3730	22.4	120	265	3930	0.125
180UP110			3x2/35W		CR or MSF	4630	27.8	120	265	4830	0.154
180UP111			3x2/54W		CR or MSF	3730	22.4	120	265	3930	0.125
180UP112			3x2/80W		CR or MSF	4630	27.8	120	265	4830	0.154

preconfigured

180UP

If you don't see a configuration you like, no problem, **KLIK** can custom make to your unique specifications.

Just turn back to the **made to measure** pages and follow the specification instructions, or call your local **KLIK** representative.

