


400
s c o r p i u s



other configurations may be possible

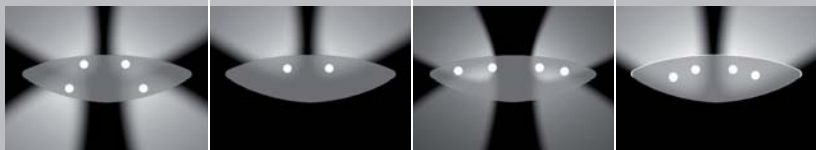

400scorpius pre-configured



1. Choose your item and lamp unit configuration from the tables on the following pages.

2-6 Select your preferred options from the choices 2 to 6 on the right

7. See an example product specification at the bottom of the page

1. part no.

choose the desired configuration from the tables on the following pages

400S105	2x2x2/28W	MSF	CR	2640	
400S106	2x2x2/35W	MSF	CR	3240	

2. optic (direct)



microsphere frosted acrylic (MSF) - 21

3. dimming



non-dim 31
1-10V 32
DSI 33
DALI 34

4. suspension



wire sling

1m - 421
2m - 422
3m - 423
4m - 424



rod

600mm - 441
1.2m - 442

5. end



countersunk philips head screws

3mm (std) - 51




counterbored socket head cap screws

5mm - 56

6. colour finish



7. example

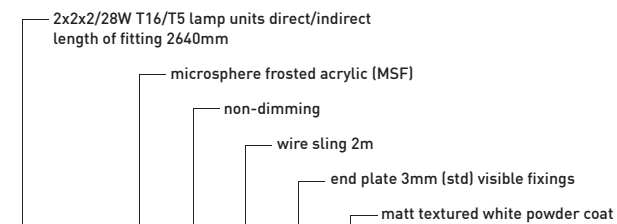


1	2	3	4	5	6	Final product specification
400S105	21	31	422	51	63	400S105 . 21 . 32 . 422 . 51 . 63

Fluorescent lamps will be supplied in colour 840 unless specified otherwise.




lamp orientation legend

lamp colours represent separate switch wiring ■ ■ ■ ■

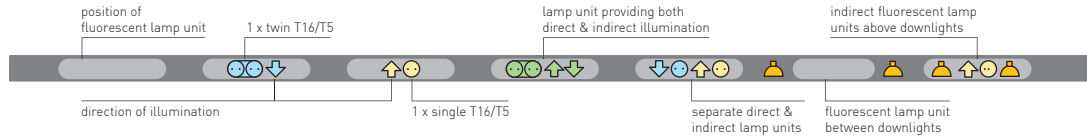

■ Data is approximate and subject to change without notice. Product images are representations only - actual product may vary.

part no.	direct	downlight	indirect	optic direct	optic indirect	length (mm)	weight (kgs)	pack size h x w x l (mm)			cubic m ³
----------	--------	-----------	----------	--------------	----------------	-------------	--------------	--------------------------	--	--	----------------------



400S101	2x1x2/28W			MSF	CR	1380	20.7	185	470	1580	0.137
400S102	2x1x2/35W			MSF	CR	1680	25.2	185	470	1880	0.163
400S103	2x1x2/54W			MSF	CR	1380	20.7	185	470	1580	0.137
400S104	2x1x2/80W			MSF	CR	1680	25.2	185	470	1880	0.163



400S105	2x2x2/28W			MSF	CR	2640	39.6	185	470	2840	0.247
400S106	2x2x2/35W			MSF	CR	3240	48.6	185	470	3440	0.299
400S107	2x2x2/54W			MSF	CR	2640	39.6	185	470	2840	0.247
400S108	2x2x2/80W			MSF	CR	3240	48.6	185	470	3440	0.299

preconfigured

If you don't see a configuration you like, no problem, **KLIK** can custom make to your unique specifications.

Just turn back to the **made to measure** pages and follow the specification instructions, or call your local **KLIK** representative.