





Middlemore Hospital

80 e c l i p s e



8 0 e c l i p s e

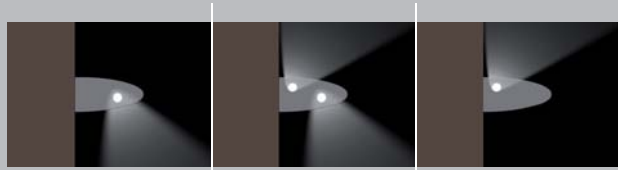

other configurations may be possible

diffusers



clear reeded acrylic



microsphere frosted acrylic








clear reeded acrylic (indirect)




microsphere frosted acrylic (indirect)

lamp units



Fluorescent Lamps		Lamp Unit Length (ECG)		
Lamp Type	W	a		b
		non dim	dim	
 T16/T5	14W/24W	-	-	580
	21W/39W	-	-	880
	28W/54W	-	-	1180
	35W/80W	-	-	1480
 T26/T8	18W	-	-	620
	30W	-	-	925
	36W	-	-	1230
	58W	-	-	1530
 TCS	5W	290	-	110
	7W	320	-	140
	9W	350	-	170
	11W	420	-	240
 TCL	18W	480	660	230
	24W	585	775	335
	36W	675	855	425
	55W	905	975	545

Downlights		a	b	c
Lamp Type	W	a	b	c
 MR11 fixed/adj	20W/35W	120	205	290

Unit lengths are approximate and may vary  
Specifications subject to change without notice


ends



suspension



connectors




90° ext



180°



90° int



space requirements

custom angled connectors available on request

accessories



1



3



2



4

- 1 adjustable low voltage MR11 downlights
  - 2 patient night light and local rocker switches
  - 3 concealed PA speaker systems.
  - 4 patient pull cord switch
  - 5 integrated patient nurse call systems
- other accessories available on request



5

packaging



4.9kg/m - 130 x 190 x (L + 200mm)

finish

- clear anodised
- matt textured silver
- matt textured white
- other colour

see [kliksystems.com](http://kliksystems.com) for current colour availability.

photometrics



photometric files available for download from [kliksystems.com](http://kliksystems.com)

# 80eclipse pre-configured



1. Choose your item and lamp unit configuration from the tables on the following pages.

2-6 Select your preferred options from the choices 2 to 6 on the right

7. See an example product specification at the bottom of the page

## 1. part no.

choose the desired configuration from the tables on the following pages

80E103	1x1/18W TC-L	2x1/36W TC-L	CR or MSF	CR	1080
80E104	1x1/18W TC-L	2x1/18W TC-L	CR or MSF	CR	700

## 2. optic (direct)



note: indirect diffusers will be clear reeded acrylic

clear reeded acrylic (CR) - 21

microsphere frosted acrylic (MSF) - 22

## 3. dimming



non-dim 31  
1-10V 32  
DSI 33  
DALI 34  
specify circuit(s) to dim

## 4. suspension



surface mount

451

## 5. end



end plate 2mm (std) visible fixings

51



end plate 5mm visible fixings

52

## 6. colour finish




clear anodised 61

other colour (refer to website) 64

matt textured silver powder coat 62

matt textured white powder coat 63

## 7. example

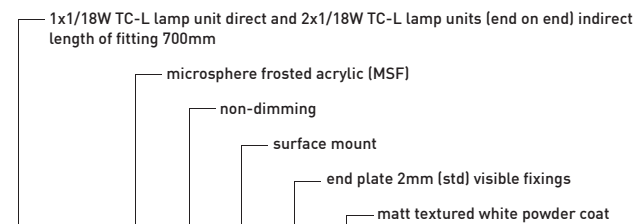


1	2	3	4	5	6	Final product specification
80E104	21	31	451	51	63	80E104 . 21 . 31 . 451 . 51 . 63

Fluorescent lamps will be supplied in colour 840 unless specified otherwise.



Lamp orientation legend

lamp colours represent separate switch wiring ■ ■ ■ ■

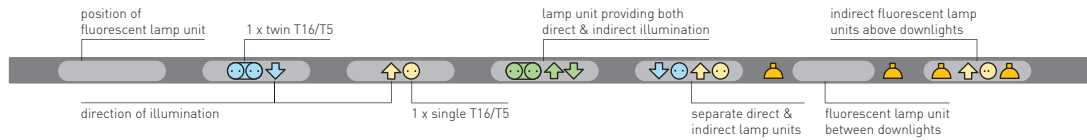

■ Data is approximate and subject to change without notice. Product images are representations only - actual product may vary.

part no.	direct	downlight	indirect	optic direct	optic indirect	length (mm)	weight (kgs)	pack size h x w x l (mm)			cubic m <sup>3</sup>
80E101	1x1/18W T26/T8		1x1/36W T26/T8	CR or MSF	CR	1430	7.0	130	190	1630	0.040
80E102	1x1/18W T26/T8		1x1/18W T26/T8	CR or MSF	CR	820	4.0	130	190	1020	0.025
80E103	1x1/18W TC-L		2x1/36W TC-L	CR or MSF	CR	1080	5.3	130	190	1280	0.032
80E104	1x1/18W TC-L		2x1/18W TC-L	CR or MSF	CR	700	3.4	130	190	900	0.022
80E105	1x1/18W TC-L	1x1/5W TCS	2x1/36W TC-L	CR or MSF	CR	1080	5.3	130	190	1280	0.032
80E106	1x1/18W TC-L	1x1/5W TCS	2x1/18W TC-L	CR or MSF	CR	700	3.4	130	190	900	0.022

preconfigured

80E

If you don't see a configuration you like, no problem, **KLIK** can custom make to your unique specifications.

Just turn back to the **made to measure** pages and follow the specification instructions, or call your local **KLIK** representative.



80 Eclipse - John Hunter Hospital

